

KAMA *by* REIS

JENERATÖR

KDE SERİSİ / KDE SERIES

Endüstriyel Jeneratörler


Industrial Generators

13 KVA-85 KVA

2 YIL
GARANTİ



reismakina
"Kalitenin Yapı Merkezi"
www.reismakina.com

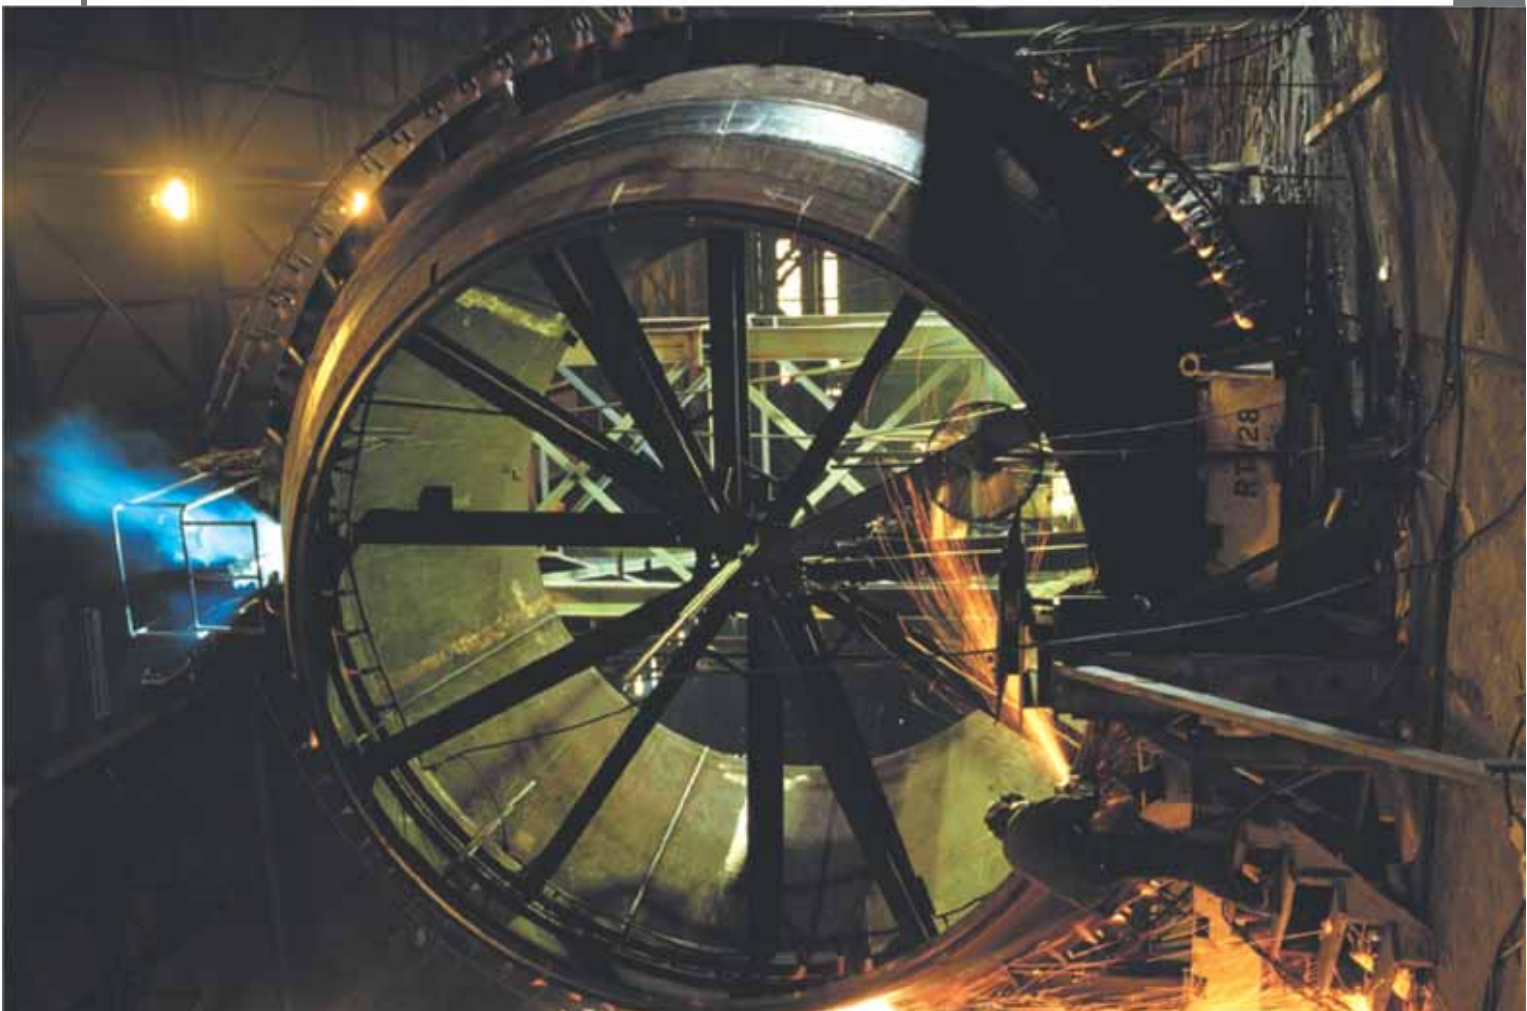



MODEL	KDE 20E3	KDE 30E3	KDE 35E3	KDE 40E3	KDE 60E3	KDE 75E3	KDE 100E3
Maksimum Çalışma Gücü KVA (kW)	18,5 KVA (14,8 kW)	28 KVA (20,8 kW)	31 KVA (24,8 kW)	40 KVA (32 kW)	54 KVA (43,2 kW)	66 KVA (52,6 kW)	85 KVA (68 kW)
Sürekli Çalışma Gücü KVA (kW)	17 KVA (13,6 kW)	24 KVA (19,2 kW)	28 KVA (22,4 kW)	38 KVA (30,4 kW)	50 KVA (40 kW)	62 KVA (49,6 kW)	80 KVA (64 kW)
Sürekli Çıkış Akımı (A)	24,5	34,6	40,4	54,8	72,2	89,5	115
Yakıt Tüketimi (Lt/Seate)	4,2	5,6	7,5	11,9	13,4	15,3	20
Genilim (Volt)	230 / 400	230 / 400	230 / 400	230 / 400	230 / 400	230 / 400	230 / 400
Frekans (Hz)	50	50	50	50	50	50	50
Güç Faktörü (Cos Q)	0,8	0,8	0,8	0,8	0,8	0,8	0,8
MOTOR / ENGINE							
Model	KD 488G	KM 493G	KM 493ZG	KM 493G-1	KD 4105ZG	KD 6105G	KD 6105ZG
Silindir Sayısı	4	4	4	4	4	6	6
Silindir Hacmi (lt)	2,19	2,7	2,7	2,7	4,33	6,49	6,49
Soğutma Sistemi	S u S o ğ u t m a l l ı / W a t e r C o o l e d						
Devir Sayısı (d/dk)	1500	1500	1500	3000	1500	1500	1500
Yakıt Tipi	Dizel	Dizel	Dizel	Dizel	Dizel	Dizel	Dizel
Maksimum Çıkış Gücü (kW)	18	25,5	31,35	44	53,9	64,9	79,2
Sürekli Çıkış Gücü (kW)	16,4	23,2	28,5	40	49	59	72
Çap x Stroke (mm)	86 x 90	98 x 102	98 x 102	98 x 102	105 x 125	105 x 125	105 x 125
Sıkıştırma Oranı	18,2:1	18,2:1	18,2:1	18,2:1	17,5:1	17,5:1	17,5:1
Yakıt Depo Kapasitesi (Lt)	85	115	115	115	150	210	210
Yağ Kapasitesi (Lt)	8,5	8,5	8,8	8,5	11	18,5	18,5
Gürültü Seviyesi (db)	88	90	90	98	97	100	102
DIĞER / OTHER							
Boyutlar UxGxY (mm)	1320x700x1280	1450x780x1035	1450x780x1035	1450x780x1035	1660x830x1160	1960x850x1540	1960x850x1650
Ağırlık (kg)	600	720	720	720	1120	1320	1320



MODEL	KDE 13SS3	KDE 20SS3	KDE 30SS3	KDE 35SS3	KDE 45SS3	KDE 60SS3	KDE 75SS3	KDE 100SS3
Maksimum Çalışma Gücü (kW)	11,6 kVA (9,3 kW)	18,5 kVA (14,8 kW)	26 kVA (20,8 kW)	31 kVA (24,8 kW)	40 kVA (32 kW)	54 kVA (43,2 kW)	66 kVA (52,6 kW)	85 kVA (68 kW)
Süreklili Çalışma Gücü (kVA)	10,6 kVA (8,5 kW)	17 kVA (13,6 kW)	24 kVA (19,2 kW)	28 kVA (22,4 kW)	37 kVA (29,6 kW)	50 kVA (40 kW)	62 kVA (49,6 kW)	80 kVA (64 kW)
Süreklili Çıkış Akımı (A)	15,3	24,5	34,6	40,4	53,4	72,2	89,5	115
Yakıt Tüketimi (lt/Saat)	3,1	4,2	6,2	7,5	11,3	13,4	15,3	20
Gerilim (Volt)	230 / 400	230 / 400	230 / 400	230 / 400	230 / 400	230 / 400	230 / 400	230 / 400
Frekans (Hz)	50	50	50	50	50	50	50	50
Güç Faktörü (Cos φ)	0,8	0,8	0,8	0,8	0,8	0,8	0,8	0,8
JENERATÖR / GENERATOR								
Model	KD 388G	KD 488G	KM 493G	KM 493ZG	KD 4106G	KD 4106ZG	KD 6106G	KD 6106ZG
Silindir Sayısı	3	4	4	4	4	4	6	6
Silindir Hacmi (lt)	1,64	2,19	2,7	2,7	4,33	4,33	6,49	6,49
Soğutma Sistemi	Su Soğutmalı / Water Cooled							
Devir Sayısı (d/dk)	1500	1500	1500	1500	1500	1500	1500	1500
Yakıt Tipi	Dizel	Dizel	Dizel	Dizel	Dizel	Dizel	Dizel	Dizel
Maksimum Çıkış Gücü (kW)	13,5	18	25,5	31,35	44,2	53,9	64,9	79,2
Süreklili Çıkış Gücü (kW)	12,3	16,4	23,2	28,5	40,2	49	59	72
Çap x Stroke (mm)	88 x 90	86 x 90	93 x 102	93 x 102	105 x 125	105 x 125	105 x 125	105 x 125
Sıkıştırma Oranı	18,2:1	18,2:1	18,2:1	18,2:1	17,5:1	17,5:1	17,5:1	17,5:1
Yakıt Depo Kapasitesi (Lt)	65	65	95	95	95	95	110	110
Yağ Kapasitesi (Lt)	6,9	8,5	8,5	8,8	11	11	18,5	18,5
Gürültü Seviyesi (db)	51	51	51	51	51	53	53	53
DIĞER / OTHER								
Boyutlar UxGxY (mm)	1570x780x1050	1570x780x1050	1900x950x1200	1900x950x1200	2250x950x1300	2250x950x1300	2700x1140x1500	2700x1140x1500
Ağırlık (Kg)	685	720	960	985	1270	1310	1650	1680

KAMA by REIS

JENERATÖR

www.kamabyreis.com

